INSTRUCTIONS

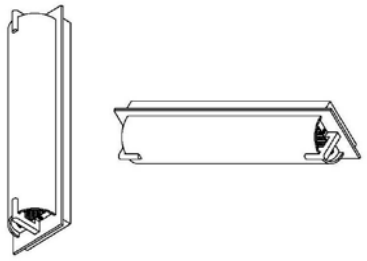

VF2500-4L-

NOTE:This fixture can be mounted horizontally or vertically.

Safety Instructions
- **Follow and save these instructions.**
- **Always disconnect power at circuit breaker.**
- **If in doubt, contact a qualified electrician.**

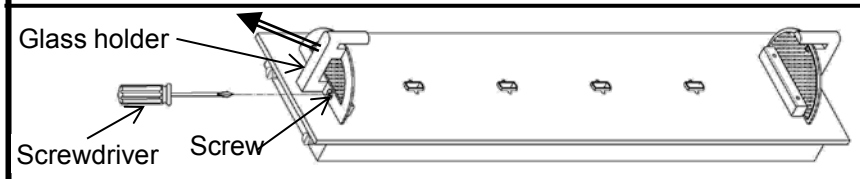

Remove glass holder from one end of fixture.

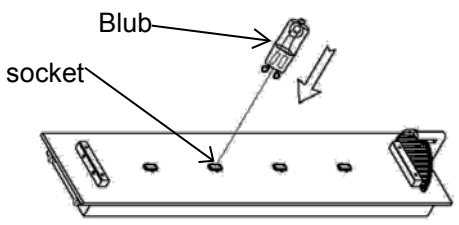

Insert the G9 bulbs.

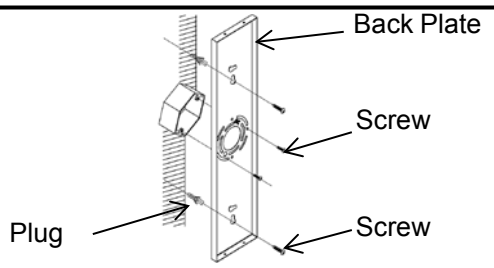

Attach back plate.

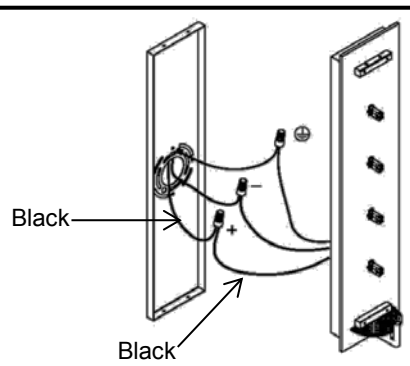

Make wiring connections,
black wire from fixture to black wire from junction box.
white wire from fixture to white wire from junction box.
Connect the copper ground wire to ground wire from junction box.

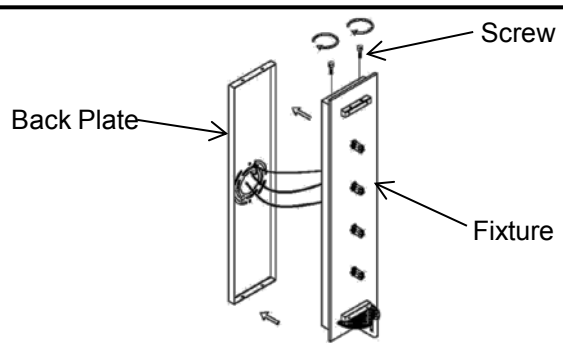

Attach fixture to the back plate,using screws provided.

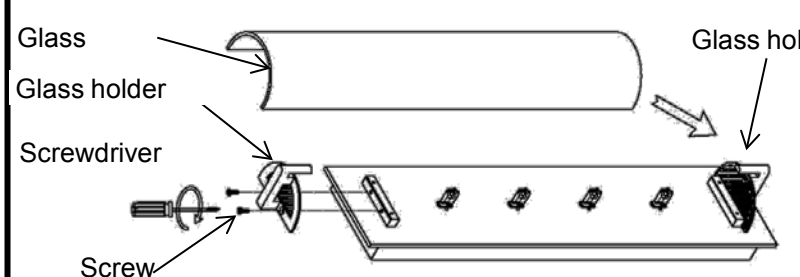

Insert the glass shade on the glass bracket.Then tighten it by the screw.